



MAVERICK[®]

HUNTING

ASSEMBLY INSTRUCTIONS

MAVERICK BLINDS

5-SHOOTER GX • 6-SHOOTER • MAVERICK XL

Welcome to the Maverick Hunting family!

It's our job to keep you out of sight and protected from the elements while you're pursuing your trophy. We hope your Maverick[®] Hunting experience is an awesome one, and that you like it enough to tell your friends and family about us.

Find our assembly video at
www.maverickhunting.com/support

Tips to ensure your Maverick blind is around for a long time:

- + Store the Blind standing up to prevent warping.
- + Protect your blind from the wind by staking it in to the ground or bolting it to a platform through the flange.
- + When operating a firearm from inside the blind, be sure the barrel is outside the window for your safety and protection.
- + If you have problems with your blind or questions, please contact us first at (920) 965-8397, do not return to the store.

our MaVerrick Blind Kit Includes:			
Part	5-Shooter GX	6-Shooter	XL
Door panel with rain guard	1	1	1
Side panel	1	1	1
Horizontal plexiglass windows	5 (22"x10")	0	0
Vertical plexiglass windows	1 (11"x19")	8 (10"x22") 1 (11"x19")	9 (11"x22")
Window hinge sets (hinges, machine screws/nuts)	11	9	18
Window clip sets (clips, machine screws)	18	27	27
Window seal roll	1	1	1
1/4" x 1" hex bolts with nuts	21	21	21
Door latches	3	3	4
Door handle kit (two plastic handles & hardware)	1	1	1
Door seal	1	1	1

Tools needed for assembly:

- + Drill with 1/4" bit
- + 5/16" and 7/16" sockets
- + Phillips head screwdriver
- + Hunting saw or utility knife

Optional tools:

- + Quick-grip or vice grip clamps
- + (to hold pieces together while drilling)
- + 7/16" wrench


Pro Tip:

install your windows before taking your blind into the field to avoid losing small hardware

INSTRUCTIONS

Step 1: Installing the Windows


- + Peel off protective wrap and install the hinges into the pre-drilled holes in each of the plexiglass windows. The hinge pins and screw heads should be inside the blind.
 - Do not overtighten the hinges to the plexiglass; this can cause the window to crack. Tighten nuts by hand or with a socket.
 - Do not use Loctite
- + From inside the blind, mount window hinges into the pre-drilled holes at the bottom or side of each blind window; hand-tighten nuts or use a 5/16" socket.
 - The screw heads and hinge pins should be inside
- + You can apply the seal to the outer edge of each window or to the blind around the window cutout, gradually peeling the white backing off as you make your way around the window and applying some tension; stay within 1/8" of the edge of the window or cutout. Cut or tear the seal from the roll when complete & move on to the next window.
- + Still from inside the blind, use machine screws to mount three window clips per window into pre-drilled holes (no nut needed).

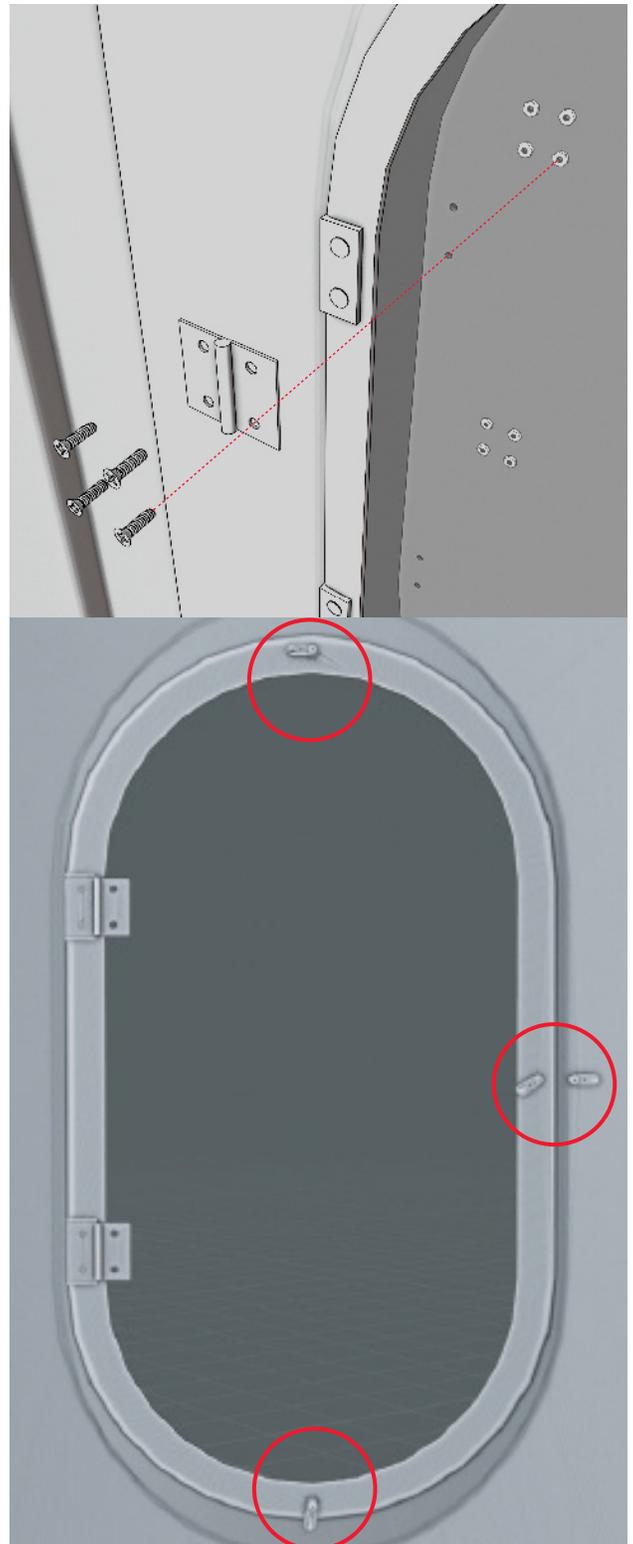

INSTRUCTIONS

Step 2: Connecting the Two Panels

- + Slide the two panels of the blind together and make sure the rain guard at the top of the door panel completely covers the flange of the other panel
 - Clamp the two panels together to secure them while you drill holes
- + Drill through the dimple marks in the top two corners and tighten the bolts by hand.
 - You may need to drill just below the dimple marks to make sure the rain guard won't get in the way of tightening the bolts.
- + Continue drilling through the dimples down each side of the blind and tightening bolts by hand or with a 7/16" socket wrench.
- + Finish by drilling through the dimples on the roof and installing bolts; then tighten all bolts once they're all installed.
 - **DO NOT** overtighten the bolts.

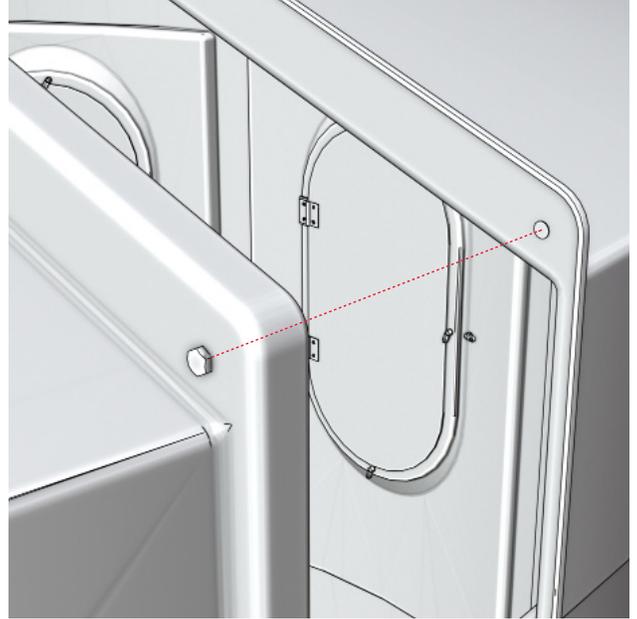

SHARE YOUR STORY

Your hunt is important to us. Send in your pictures, your favorite Maverick moments, and as much or as little you'd like to share on MaverickHunting.com



Step 3: BLIND SPECIFIC

Page 5: 5-Shooter GX or 6-Shooter

Page 6: Maverick XL

INSTRUCTIONS

5-SHOOTER GX • 6-SHOOTER

Step 3: Installing the door hardware on your 5-Shooter GX or 6-Shooter

- + Cut the remaining two tabs out of the door using a hunting saw or other utility-type knife.
 - Tabs are left in the place to secure the door during shipping
- + Slide the door seal onto the blind. You can trim the seal at each corner or wrap it continuously until you get to the hinges. Trim the remaining seal piece to fit between the door hinges.
 - You may have to push or tap the seals on.
- + Install door handle using the middle set of pre-drilled holes; they go back-to-back on the outside and inside.
- + Install the three door latches using the pre-drilled holes. There are two for the outside and one for the inside of the blind.



INSTRUCTIONS

MAVERICK XL

Step 3: Installing the door hardware on your Maverick XL

- + Cut the remaining two tabs out of the door using a hunting saw or other utility-type knife.
 - Tabs are left in the place to secure the door during shipping
- + Slide the door seal onto the Door on the top, bottom, and handle side. Install the seal on the Blind between the door hinges.
 - You can trim the seal at each corner and the remaining seal piece to fit between the door hinges.
 - You may have to push or tap the seals on.
- + Install door handle using the middle set of pre-drilled holes; they go back-to-back on the outside and inside.
- + Install the two sets of door latches using the pre-drilled holes. There are two latches for the outside and two for the inside of the blind. Latches with through holes go on the inside and screws install from the inside of the blind, through the inside latches, and thread into the inside door latches. and one for th inside of the blind.



OUTSIDE



INSIDE

